

# **DOWNFORCE – REAR WINDOW GARNISH**

## **INSTALLATION AND USER'S INSTRUCTIONS**

Thank you for purchasing the DF Rear Window Garnish (RWG) from Downforce.

Before beginning any removal or installation, please take time to thoroughly read through the instructions.

The DF RWG is designed for increasing the amount of air entering into the engine bay. This is a function of speed over volume. As the speed increases while traveling more air will be forced into the engine bay compartment. The RWG has been modified slightly to have a scoop like shape modeled after the Porsche GT3 Cup cars, which is slightly raised by 3/4" in height and the backside of the scoop, was extended by 1-1/2" in. None of these changes are noticeable until it is compared side by side.

- There are several WARNING sections in the installation. Always read and follow the instruction to prevent injuries, accidents, and possible damage to the vehicle.
- Do not modify the RWG in any way.
- Do not install the RWG in any way other than described in the following instructions.
- If you have any questions about the use of the RWG, ask Downforce about any concerns you may have.
- Downforce and its dealers are not responsible for injuries, accidents, and damage to persons and property that arise from the use of this product.

<b>PART NAME</b>	<b>DF REAR WINDOW GARNISH</b>
<b>PART NUMBER</b>	<b>DF-AAA264</b>
<b>VEHICLE</b>	<b>ACURA NSX 1991-2005</b>

## 1 Requirements


The only requirement to install this product is to have the proper tools and the ability to open the trunk lid. This is a 10 minute process and please take your time to make sure you do not drop any of the screws while removing or installing the rear window garnish.

## 2 Tools and Equipments Needed



## 3 Packing List

Carbon Fiber Rear Window Garnish

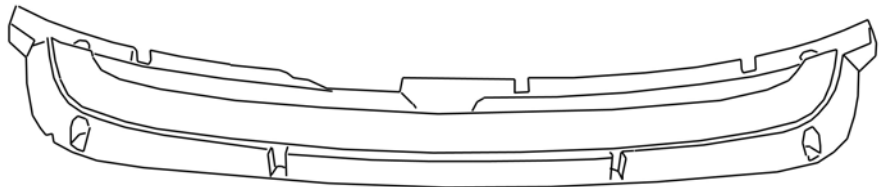

## 4 Setup and Preparations

- 1.) First mark the gap line of the RWG against the trunk lid as a base line. This is very important step to properly align this product.
- 2.) Make sure both the rear window hatch and rear trunk struts are properly working or can be safely propped up.

## 5 Rear Window Garnish Removal and Installation

- 1.) Use a screwdriver to remove all (7) screws.
- 2.) Remove the factory RWG and replace with DF RWG.
- 3.) Gently screw in all (7) screws **DO NOT TIGHTEN**
- 4.) Some holes may need to be redrilled bigger.
- 5.) Make sure the RWG can be adjusted freely by hand.
- 6.) Close the trunk lid completely.
- 7.) Adjust the RWG gap line against the trunk by hand.
- 8.) Once satisfied, tighten the (3) screws.
- 9.) Open the trunk lid.
- 10.) Tighten the remaining (4) screws.

